

GENERAL NOTES:

2. THE DESIGN ENGINEER, MANUFACTURER REPRESENTATIVE, AND SUFFOLK COUNTY REPRESENTATIVES SHALL OBSERVE THE INSTALLATION OF THE OWTS AND DRAINFIELD. APPROVAL SHALL BE OBTAINED FROM ALL THREE PRIOR TO BACKFILL THE SYSTEM STARTUP WILL BE COMPLETED UNDER THE DIRECT SUPERVISION OF A MANUFACTURE

3. THE OWTS INSTALLER SHALL HOLD AN VA OWTS ENDORSEMENT FROM SUFFOLK COUNTY DEPARTMENT OF HEALTH AND SHALL BE AN AUTHORIZED INSTALLER.

12. A HOUSE TRAP SHALL NOT BE INSTALLED OR EXIST UPSTREAM OF THE UA OWTS, VENTING MILL OCCUR THROUGH THE HOUSE VENTING SYSTEM AND ADDITIONAL VENTING IS NOT REQUIRED. 6, PROVIDE 2" VENT PIPE FROM THE OWTS TO THE SINGLE FAMILY DWELLING AND CONNECT TO THE SEWER VENTING SYSTEM WITHIN THE HOUSE, PIPE SHALL HAVE A POSITIVE SLOPE FROM THE OWTS TO THE HOUSE SO ANY LIQUID WILL DRAIN TOWARD T


THE OWTS AND SEPTIC TANK SHALL BE TESTED FOR WATERTIGHTNESS IN A METHOD APPROVED BY THE MAUNFACTURER PRIOR TO ARRIVING ON SITE.

7. THE CONTRACTOR SHALL PROVIDE A DEDICATED 20 AMP CIRCUIT BREAKER IN THE MAIN DWELLING FOR THE VA OWTS. SEE THE ONE LINE WIRING SCHEMATIC IN DETAIL 5. 10. THE I/A OWTS SHALL BE REGISTERED WITH SCDH IN ACCORDANCE WITH ARTICLE 19 OF THE SUFFOLK COUNTY SANITARY CODE. 11. MANUFACTURER SHALL PROVIDE AN INITIAL 3-YEAR

Seal / Signature

IF BACKFILL REQUIRED:
ASTM C33 SAND GRADATION

SIEVE	PERCENT PASSING	
0.375"		100
#4		95-100
#8		80-100
#16		50-85
#30	-	25-60
#50		5.0-30.0
#100		< 10
#200		< 5

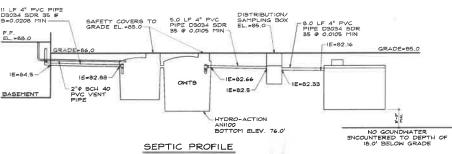

Project No.: 2137 TALO BUILDING CORP

S.C.T.M #: 0300-113-03-24.24

Architect of Record Jason M. Ormond, Architect

120 Mill Road Westhampton Beach, NY 11978 T: 631-897-3775 F: 631-288-0549 E: jason@jm Date Scale 1"=30"

Drawing Title SITE PLAN

Drawing No.: